


## 2.2 CIRCULAR SAW BLADES FOR RIPPING

### PSW

#### 20 AA

Circular saw blades for ripping of soft wood. Can be applied also for hardwood - moderately precise woodworking.

D [mm]	B [mm]	b [mm]	d [mm]	z	o ●
250	1,6	1,2	70	36	o
300	3,2	2,2	30	20	●
300	3,2	2,2	30	24	●
350	3,2	2,2	30	24	●

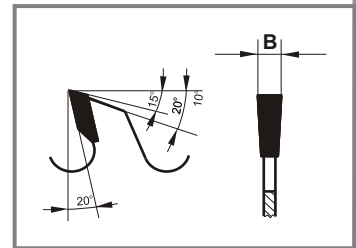


### PSW

#### 20 AA-B

Circular saw blades for ripping of wood with curved tooth for high travelling speed.

D [mm]	B [mm]	b [mm]	d [mm]	z	o ●
450	4,2	2,8	30	24	●
500	4,6	3,2	40	24	●

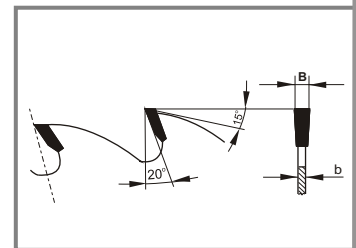


### PSW

#### 20 AAE

Circular saw blades for ripping of plastics and dry wood, guaranting very high quality of face of cut.

D [mm]	B [mm]	b [mm]	d [mm]	z	p × d <sub>1</sub> × D/C	o ●
225	2,8	2,0	60	42	3 × 10 × 74	●
225	6,5	5,0	60	42	3 × 10 × 74	●

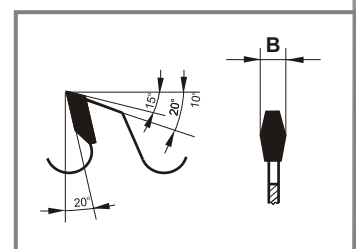


**PSW**

**20 BA**

Circular saw blades for ripping of hardwood and softwood, first of all for hardwood cutting.

D [mm]	B [mm]	b [mm]	d [mm]	z	o ●
160	2,7	1,8	30	24	●
180	2,8	1,8	30	18	●
180	2,8	1,8	40	18	●
200	3,2	2,2	30	24	●
220	2,35	1,6	65	36	●
220	2,85	2,0	65	36	●
250	3,2	2,2	30	24	●
300	3,2	2,2	30	24	●
300	3,2	2,2	30	32	●
350	3,2	2,2	30	24	●
400	4,0	2,8	30	36	●
400	4,0	2,8	30	48	●

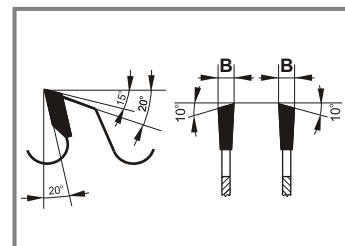


**PSW**

**20 AA-S**

Circular saw blades with safety teeth for ripping of hardwood and softwood, recommended for knotty timber and for working on machines with hand feed.

D [mm]	B [mm]	b [mm]	d [mm]	z	o ●
300	3,2	2,2	30	16	●
315	3,2	2,2	30	16	●
350	3,2	2,2	30	24	●
400	4,0	2,8	30	18	●

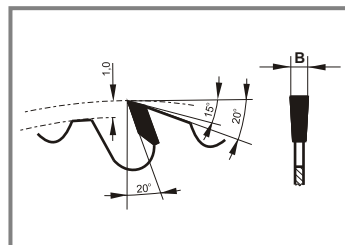


**PSW**

**20 BA-S**

Circular saw blades wit safety teeth, suitable for knotty timber and for working on machines with hand feed.

D [mm]	B [mm]	b [mm]	d [mm]	z	o ●
250	3,2	2,2	30	20	o
300	3,2	2,2	30	24	o
350	3,5	2,5	30	28	o
400	3,5	2,5	30	32	o

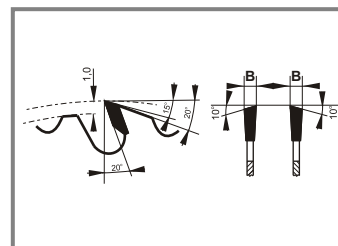


**PSW**

**20 BA-X**

Circular saw blades with hub, suitable for ripping of hardwood and softwood. Thanks to special construction it gets a very thin kerf width. Cutting can be run till 15% of blade diameter height.

D [mm]	B [mm]	b [mm]	d [mm]	z	h [mm]	right R left L	o ●
200	1,5	1,0/2,0	30	32	30	R	o
200	1,5	1,0/2,0	30	32	30	L	o
300	1,5	1,0/2,2	30	48	45	R	o
300	1,5	1,0/2,2	30	48	45	L	o
350	1,8	1,2/2,5	30	56	53	R	o
350	1,8	1,2/2,5	30	56	53	L	o

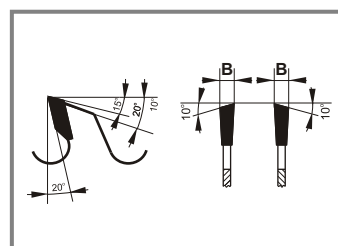

CIRCULAR SAW BLADES